



Lyric Smart Controller Quick User Guide

INTRODUCTION

These instructions provide a brief overview of common system functions. Refer to the online User guide for detailed information.

ARM THE SYSTEM



Press **Security** icon on **Home** screen

1



Arm Away (when you're out)

Select

OR




Arm Stay (when you'll be home)

OR



Arm Custom (bypass selected zones)

2



Enter user code

3

What Happens

- System arms in selected mode
- Exit Delay countdown begins
- Keypad beeps begin

4

DISARM THE SYSTEM




Press Security **Armed** icon on Home screen

1



Press **Disarm** icon on Security screen

2



Enter user code

3

What Happens

- System Disarms
- Entry Delay beeps stop

4

Alarm Memory

If an alarm has occurred, zones with alarms remain displayed.

Repeat Disarm sequence to clear display.

5

BYPASS ZONES




Press Security icon on Home Screen

1



Press **Zones** icon on Security screen

2



Select zones to bypass from list

3

Press

Bypass

4

Bypassed zones appear in list with icon



5

PANIC ALARMS

On Control Panel:



Press and hold **Panic** button for 3 seconds

1

Within 5 seconds, PRESS:



Medical OR




Fire OR



Police

2

What Happens

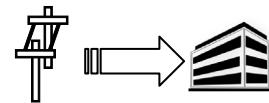

Alarm message is sent to central station


3

ASSIGN USER CODES



Press **Tools** icon on Security screen

1



Enter **Master User** code

2



Press **Users** icon

3

To Add **New User**

Add New + **Name**


To Set or Change **Guest** code

Guest + **Edit**

To Set or Change **Duress** code

Duress + **Edit**

4



Assign 4-digit user code and **Save**


5

USE AUTOMATION DEVICES (Z-WAVE)




Press **Automation** icon on Home screen

1

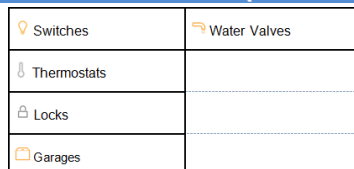

Select type of device

2

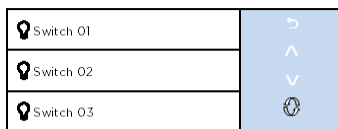

Select a specific device from the list.

3

Select the desired action for that device



4

ADD/REMOVE DEVICES (Include/Exclude)



Press **Automation** icon on Home screen

1

Scroll down on device list, press **Tools**



2

include

to add device

OR

exclude

to remove device

3

Follow the prompts and activate the device's Function button.

Note: These steps can vary with each Z-Wave device.

4

Read the device's instructions and see **Working with Z-Wave Devices** in the User Guide. The User Guide also contains information on Lyric's compatibility with different types and brands of Z-Wave devices.


5

DEFINE SMART ACTIONS



Press **Smart Actions** icon on Home screen

1



Enter Master User code

2

Add New

THEN

Anytime

OR

Triggered

OR

Scheduled

3



AND

New Action

4

Set **Devices** like lights and locks to activate

AND/OR

Set **Security** to Arm or Disarm

5



Set

OR

Define events that trigger system operations or **end** system operations

6

Save

7

VIEW CAMERAS




Press **VIDEO** icon on Home screen

1



(System may scan for cameras)

2

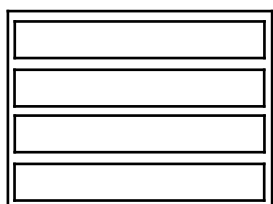

Select up to 4 cameras

3

Display


video from available cameras

OR

Scan


to list newly-installed cameras

4



View one or more cameras at once

5



Control features like Pan and Zoom from the panel

6


SETTINGS



Press **Settings** icon on Home screen

1


Adjust screen brightness...

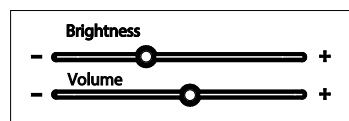

...and Voice/Chime volume

2

Mute Voice and Chimes if desired



3



Press **Clean** icon, then use damp, soft cloth while screen is disabled for 15 seconds

4

TEST THE SYSTEM (to be conducted weekly)




Press **Security** icon on Home screen

1



Press **Tools** icon on Security screen

2



Enter Master User code

3

Press **TEST** icon



THEN

Select **Walk Test, Comm. Test** or **Reboot**

4

